

# MARUNAKA

MODEL: HFX600DT-DELUXE



PROFESSIONAL




# MARUNAKA

**Professional Model : HFX600DT**  
**finding the best SOLUTION**




TRANSPARENT FRONT GUARD  
 FOR OPERATION WITH  
 WIDE VISUAL FIELD.

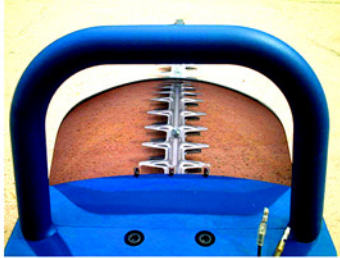



PIVOTED TURN HANDLE  
 HAS ALREADY EARNED AS  
 STANDARD FEATURE OF  
 MARUNAKA HEDGE TRIMMER.



PERFECT LOW VIBRATIONS  
 REALISED BY NEW FLOATING  
 ABSORBER FRAME.

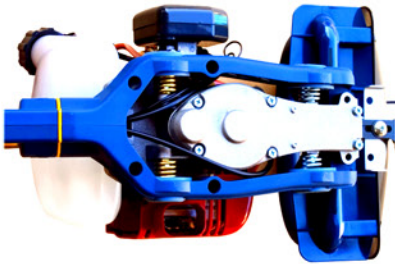

BLADE BREAKING FOR  
 SAFETY OPERATION AND  
 PRECISE TRIMMING WORK.

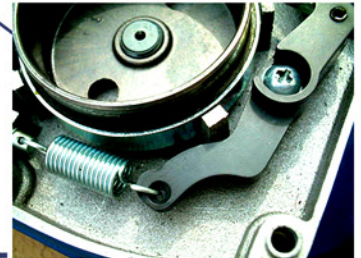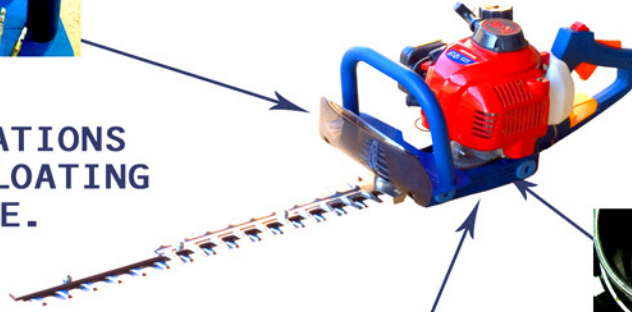

MODEL	HFX600DT-Deluxe with ANTI-VIBRATION & BLADE BREAKING SYSTEM	
Dimensions	1038(L)x240(W)x223(H)mm	
Dry weight W/O engine	2.9kg	
Blade Length(operative length)	600mm(520mm)	
Blade Pitch	35mm	
Blade Speed	1.78m/s	
Gear Ratio	1/4.08	
Engine model	Kawasaki TH23	Mitsubishi TL201
Type	Air cooled 2 cycle petrol VERTICAL	
displacement (ml)	22.5	20.1
Max.power kW(Ps)	1.0(1.3)	0.77(1.0)
Fuel tank capacity(Litre)	0.5	0.4
Carburettor	Diaphragm type	
Dry weight	2.3kg	2.1kg

\*For any further enquiries to our product, please ask our distributor or contact us via e-mail. Thank you very much!

\*Specifications are subject to change without previous notice.



Japanese engines  
 Kawasaki TH series and  
 Mitsubishi TL series already  
 complied with the emission  
 regulations 2002/88/CE



**MARUNAKA, LTD.**

11, MUKAIDANISHIMACHI, KISSHOIN, MINAMIKU, KYOTO,  
 JAPAN 601-8307 TEL:+81-75-321-1901,1902 FAX:+81-75-313-4966  
 E-MAIL:info-e@marunaka-japan.co.jp http://www.marunaka-japan.co.jp/